


Application

T-321SS bellows element can withstand operating temperatures up to 1200°F. Designed for exceptional cyclical fatigue life (EJMA 10th Edition design standards). Flow liner included on all bellows. "Snubber" convolution added to further damp vibration and reinforce the bellows neck. Floating inlet flange is integral to bellows element. ANSI 125/150# flange pattern. High temp black powdercoat finish. Available with 304S and 316SS connections. Optional finishes are available. Hastelloy X and Inconel 625 bellows elements also available.

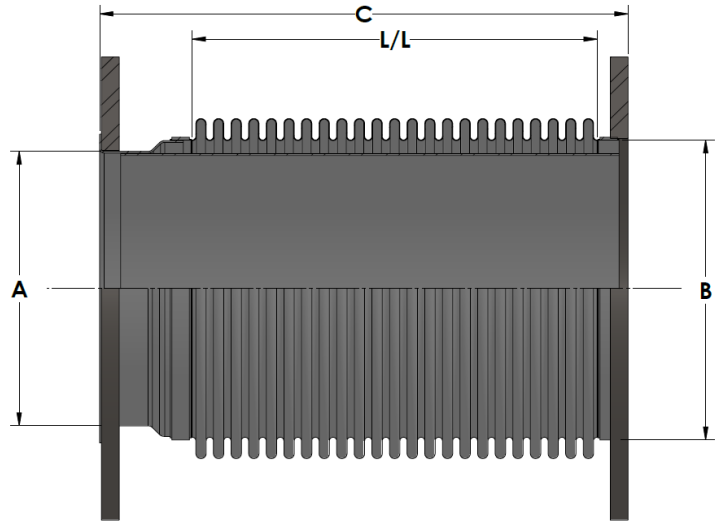

Part Number	Bellows Nominal Size	Bellows Live Length (L/L)	Inlet Size (A)	Outlet Size (B)	Length (C)	Axial Compression	Lateral Offset
000-002-394	3.00	12.00	3.00	3.00	15.00	2.00	1.50
000-002-395	3.00	12.00	3.00	4.00	15.00	2.00	1.50
000-002-396	3.00	12.00	3.00	5.00	15.00	2.00	1.50
000-002-397	4.00	12.00	4.00	4.00	15.00	2.00	1.50
000-002-398	4.00	12.00	4.00	5.00	15.00	2.00	1.50
000-002-399	4.00	12.00	4.00	6.00	15.00	2.00	1.50
000-002-400	5.00	12.00	5.00	5.00	15.00	3.25	1.50
000-002-401	5.00	12.00	5.00	6.00	15.00	3.25	1.50
000-002-402	5.00	12.00	5.00	8.00	15.00	3.25	1.50
000-002-403	6.00	12.00	6.00	6.00	15.00	3.50	1.50
000-002-404	6.00	12.00	6.00	8.00	15.00	3.50	1.50
000-002-405	6.00	12.00	6.00	10.00	15.00	3.50	1.50
000-002-406	8.00	12.00	8.00	8.00	15.00	3.50	1.25
000-002-407	8.00	12.00	8.00	10.00	15.00	3.50	1.25
000-002-408	8.00	12.00	8.00	12.00	15.00	3.50	1.25
000-002-409	10.00	12.00	10.00	10.00	15.00	4.00	1.25
000-002-410	10.00	12.00	10.00	12.00	15.00	4.00	1.25
000-002-411	10.00	12.00	10.00	14.00	15.00	4.00	1.25
000-002-412	12.00	12.00	12.00	12.00	15.00	4.00	1.00
000-002-413	12.00	12.00	12.00	14.00	15.00	4.00	1.00
000-002-414	12.00	12.00	12.00	16.00	15.00	4.00	1.00
000-002-415	14.00	12.00	14.00	14.00	15.00	4.50	1.00
000-002-416	14.00	12.00	14.00	16.00	15.00	4.50	1.00
000-002-417	14.00	12.00	14.00	18.00	15.00	4.50	1.00
000-002-418	16.00	12.00	16.00	16.00	15.00	4.50	1.00
000-002-419	16.00	12.00	16.00	18.00	15.00	4.50	1.00
000-002-420	16.00	12.00	16.00	20.00	15.00	4.50	1.00
000-002-421	18.00	12.00	18.00	18.00	15.00	4.50	0.88
000-002-422	18.00	12.00	18.00	20.00	15.00	4.50	0.88
000-002-423	18.00	12.00	18.00	22.00	15.00	4.50	0.88

All dimensions are in inches, all weights are in pounds and are approximate. Axial and Lateral movements are non-concurrent.

PO BOX 1235 • Lakeville, MN 55044 • 952-461-0237

www.advancedexhaustsolutions.com