


Application

T-321SS bellows element can withstand operating temperatures up to 1200°F. Designed for exceptional cyclical fatigue life (EJMA 10th Edition design standards). Flow liner included on all bellows. "Snubber" convolution added to further damp vibration and reinforce the bellows neck. Floating engine specific inlet flange is integral to bellows element. ANSI 125/150# flange pattern. High temp black powdercoat finish. Available with 304S and 316SS connections. Optional finishes are available. Hastelloy X and Inconel 625 bellows elements also available.

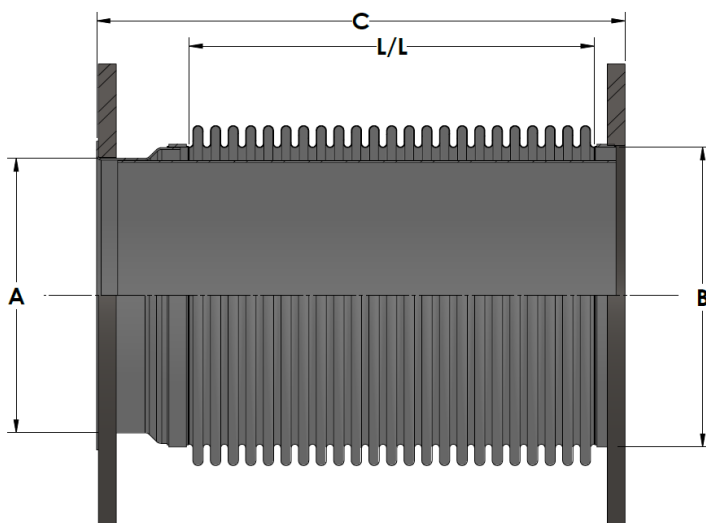

Part Number	Bellows Nominal Size	Bellows Live Length (L/L)	Inlet Size (A)	Outlet Size (B)	Length (C)	Axial Compression	Lateral Offset
000-001-100	5.00	12.00	5.00 CAT	5.00 ANSI	15.00	3.25	1.50
000-001-101	5.00	12.00	5.00 CAT	6.00 ANSI	15.00	3.25	1.50
000-001-102	5.00	12.00	5.00 CAT	8.00 ANSI	15.00	3.25	1.50
000-001-103	6.00	12.00	6.00 CAT	6.00 ANSI	15.00	3.50	1.50
000-001-104	6.00	12.00	6.00 CAT	8.00 ANSI	15.00	3.50	1.50
000-001-105	6.00	12.00	6.00 CAT	10.00 ANSI	15.00	3.50	1.50
000-001-106	8.00	12.00	8.00 CAT	8.00 ANSI	15.00	3.25	1.50
000-001-107	8.00	12.00	8.00 CAT	10.00 ANSI	15.00	3.25	1.50
000-001-108	8.00	12.00	8.00 CAT	12.00 ANSI	15.00	3.25	1.50
000-001-109	8.00	12.00	8.00 CAT	14.00 ANSI	15.00	3.50	1.50
000-001-300	5.00	12.00	5.00 CUM	5.00 ANSI	15.00	3.25	1.50
000-001-301	5.00	12.00	5.00 CUM	6.00 ANSI	15.00	3.25	1.50
000-001-302	5.00	12.00	5.00 CUM	8.00 ANSI	15.00	3.25	1.50
000-001-303	6.00	12.00	6.00 CUM	6.00 ANSI	15.00	3.50	1.50
000-001-304	6.00	12.00	6.00 CUM	8.00 ANSI	15.00	3.50	1.50
000-001-305	6.00	12.00	6.00 CUM	10.00 ANSI	15.00	3.50	1.50
000-001-500	6.00	12.00	6.00 MTU	6.00 ANSI	15.00	3.50	1.50
000-001-501	6.00	12.00	6.00 MTU	8.00 ANSI	15.00	3.50	1.50
000-001-502	6.00	12.00	6.00 MTU	10.00 ANSI	15.00	3.50	1.50
000-001-503	8.00	12.00	8.00 MTU	8.00 ANSI	15.00	3.25	1.50
000-001-504	8.00	12.00	8.00 MTU	10.00 ANSI	15.00	3.25	1.50
000-001-505	8.00	12.00	8.00 MTU	12.00 ANSI	15.00	3.25	1.50
000-001-506	10.00	12.00	10.00 MTU	10.00 ANSI	15.00	4.00	1.25
000-001-507	10.00	12.00	10.00 MTU	12.00 ANSI	15.00	4.00	1.25
000-001-508	10.00	12.00	10.00 MTU	14.00 ANSI	15.00	4.00	1.25

All dimensions are in inches, all weights are in pounds and are approximate. Axial and Lateral movements are non-concurrent.