





ADVANCED EXHAUST SOLUTIONS

**Corrugated Annular Flex Hose Expansion Joints
Caterpillar**

Application

T-321SS flex hose element can withstand operating temperatures up to 1200°F. Engine specific inlet flange, and a standard floating ANSI 125/150# flange pattern outlet flange connection, for easy installation and maximum sealing surface contact. High temp black paint finish. Available with 304S and 316SS connections. Optional finishes are available. Hastelloy X and Inconel 625 flex elements also available.

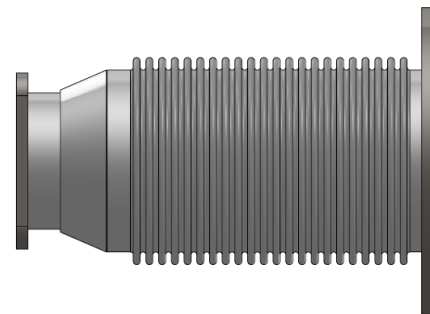

Genset Model	Engine Model	Part Number	Inlet Size	Outlet Size	Length	Nominal Hose Diameter
C9	C9	000-002-785	5.00 Slotted Cuff	6.00 ANSI	18.00	5.00
C15	C15	000-002-767	6.00 CAT	8.00 ANSI	18.00	8.00
C18	C18	000-002-741	8.00 CAT	8.00 ANSI	18.00	8.00
C27	C27	000-002-722	8.00 CAT	10.00 ANSI	18.00	10.00
C32	C32	000-002-722	8.00 CAT	10.00 ANSI	18.00	10.00
3512C	3512C	000-002-741	8.00 CAT	8.00 ANSI	18.00	8.00
3516C	3516C	000-002-722	8.00 CAT	10.00 ANSI	18.00	10.00
3516C-HD	3516C-HD	000-002-725	8.00 CAT	12.00 ANSI	18.00	12.00
C175-16	C175-16	000-002-754	10.00 ANSI	10.00 ANSI	18.00	10.00
C175-20	C175-20	000-004-449	18.00 ANSI	18.00 ANSI	18.00	18.00

All dimensions are in inches, all weights are in pounds and are approximate.

