




ADVANCED EXHAUST SOLUTIONS

Gaskets

Advanced Exhaust Solutions full face gaskets are designed for high temperatures service conditions, featuring a vermiculite/fiber facing mechanically bonded (without adhesives to burn off) to a tanged steel core. Rated for 1800°F this gasket can survive where graphite and other materials will fail. All gaskets are 0.063" thick to ensure sealing on your toughest applications.

Full Faced Gaskets ANSI 125/150# Flange Pattern

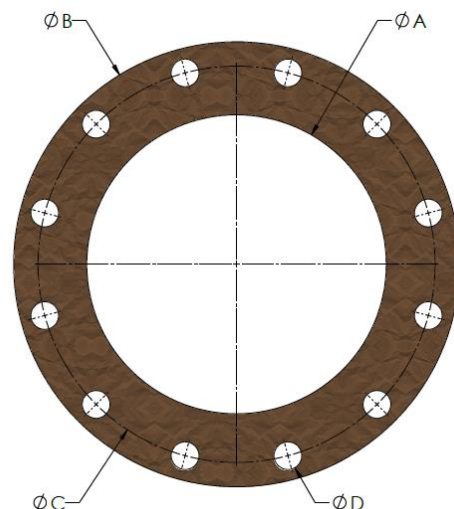

Part Number	Size (A)	Diameter (B)	Bolt Hole Diameter (C)	BHC Diameter (D)	# of Bolt Holes
000-000-691	3.00	7.50	0.75	6.00	4
000-000-692	3.50	8.50	0.75	7.00	8
000-000-679	4.00	9.00	0.75	7.50	8
000-000-680	5.00	10.00	0.88	8.50	8
000-000-681	6.00	11.00	0.88	9.50	8
000-000-682	8.00	13.50	0.88	11.75	8
000-000-683	10.00	16.00	1.00	14.25	12
000-000-684	12.00	19.00	1.00	17.00	12
000-000-685	14.00	21.00	1.13	18.75	12
000-000-686	16.00	23.50	1.13	21.25	16
000-000-687	18.00	25.00	1.25	22.75	16
000-000-688	20.00	27.50	1.25	25.00	20
000-000-689	22.00	29.50	1.38	27.25	20
000-000-690	24.00	32.00	1.38	29.50	20

All dimensions are in inches, all weights are in pounds and are approximate.

The information provided in this document is intended for informational purposes only and is subject to change without notice.

