




ADVANCED EXHAUST SOLUTIONS

Full Faced Gaskets Caterpillar / Cummins / MTU / Mitsubishi

Gaskets

Advanced Exhaust Solutions full face gaskets are designed for high temperatures service conditions, featuring a vermiculite/fiber facing mechanically bonded (without adhesives to burn off) to a tanged steel core. Rated for 1800°F this gasket can survive where graphite and other materials will fail. All gaskets are 0.063" thick to ensure sealing on your toughest applications.

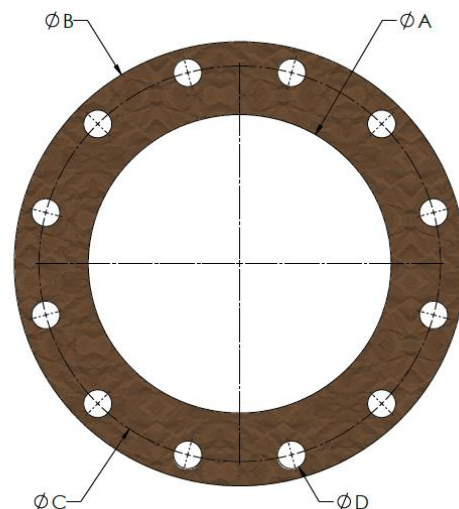

Part Number	Engine	Size (A)	Diameter (B)	Bolt Hole Diameter (C)	BHC Diameter (D)	# of Bolt Holes
000-000-750	Caterpillar	3.00	5.50*	0.56	4.13**	4
000-000-751	Caterpillar	4.00	5.50*	0.56	4.13**	4
000-000-752	Caterpillar	5.00	6.50*	0.66	6.00**	4
000-000-753	Caterpillar	6.00	7.75*	0.81	6.00**	4
000-000-754	Caterpillar	8.00	11.00	0.54	9.88	8
000-000-755	Caterpillar	10.00	13.50	0.56	12.44	12
000-000-756	Caterpillar	12.00	16.00	0.56	14.80	12
000-000-757	Caterpillar	14.00	18.00	0.56	17.00	12
000-000-758	Caterpillar	16.00	23.50	0.80	21.25	16
000-000-759	Caterpillar	18.00	22.50	0.63	20.88	16
000-000-760	Cummins	5.00	8.00	0.56	7.19	8
000-000-761	Cummins	6.00	8.00	0.56	7.19	8
000-000-718	MTU	6.00	9.25	0.43	8.19	6
000-000-762	MTU	8.00	11.00	0.56	9.88	8
000-000-763	MTU	10.00	13.00	0.63	11.88	8
000-000-714	Mitsubishi	8.00	12.60	0.88	11.06	8
000-000-715	Mitsubishi	10.00	13.50	0.63	11.88	8
000-000-716	Mitsubishi	12.00	13.50	0.63	11.88	8
000-000-717	Mitsubishi	14.00	18.88	1.00	17.13	12

All dimensions are in inches, all weights are in pounds and are approximate.

The information provided in this document is intended for informational purposes only and is subject to change without notice.

*Square Gasket

** Bolt Hole Spread

