


### Application

Fully welded steel construction with formed mounting base. Designed for exceptional cyclical fatigue life. Vermiculite gasket allows for unrestrained thermal expansion. High temp black paint finish. Available in 304S and 316SS construction. Optional finishes are galvanized and aluminum thermal spray coat.

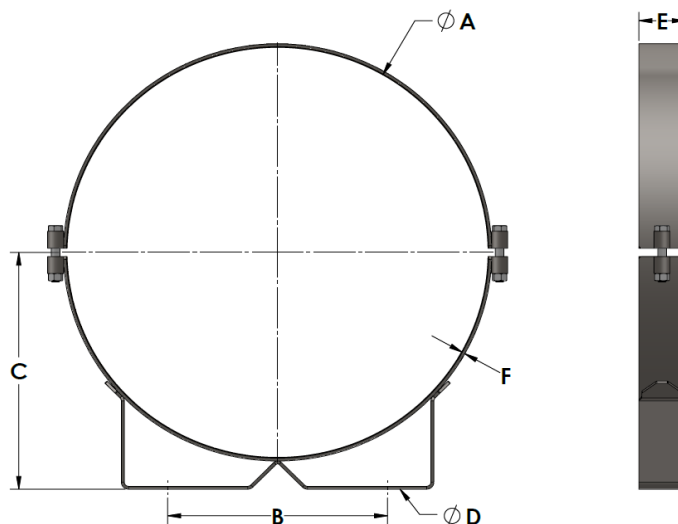

| Part Number | Size  | ID (A) | Bolt Hole Spread (B) | Center Line Height (C) | Bolt Hole Diameter (D) | Band Width (E) | Thickness (F) |
|-------------|-------|--------|----------------------|------------------------|------------------------|----------------|---------------|
| 000-002-205 | 18.00 | 18.25  | 10.00                | 12.00                  | 0.50                   | 2.00           | 0.135         |
| 000-002-206 | 20.00 | 20.25  | 11.00                | 13.00                  | 0.63                   | 2.50           | 0.135         |
| 000-002-207 | 22.00 | 22.25  | 12.00                | 14.00                  | 0.63                   | 2.50           | 0.135         |
| 000-002-208 | 24.00 | 24.25  | 13.00                | 15.00                  | 0.63                   | 2.50           | 0.135         |
| 000-002-209 | 26.00 | 26.38  | 14.00                | 16.00                  | 0.75                   | 3.00           | 0.188         |
| 000-002-210 | 28.00 | 28.38  | 15.00                | 17.00                  | 0.75                   | 3.00           | 0.188         |
| 000-002-211 | 30.00 | 30.38  | 16.00                | 18.00                  | 0.75                   | 3.00           | 0.188         |
| 000-002-212 | 34.00 | 34.38  | 18.00                | 20.00                  | 0.75                   | 3.00           | 0.188         |
| 000-002-213 | 36.00 | 36.38  | 19.00                | 21.00                  | 0.88                   | 4.00           | 0.25          |
| 000-002-214 | 42.00 | 42.50  | 22.00                | 24.00                  | 0.88                   | 4.00           | 0.25          |
| 000-002-215 | 48.00 | 48.50  | 25.00                | 27.00                  | 0.88                   | 4.00           | 0.25          |
| 000-002-216 | 54.00 | 54.50  | 28.00                | 30.00                  | 0.88                   | 4.00           | 0.25          |
| 000-002-217 | 60.00 | 60.50  | 31.00                | 33.00                  | 0.88                   | 4.00           | 0.25          |

All dimensions are in inches, all weights are in pounds and are approximate.

Not recommended for vertical or overhead suspension installations.

The information provided in this document is intended for informational purposes only and is subject to change without notice.

